






























i-Fitting®



i-Fitting Index

	SUI Union	5P		SFEI Female Elbow	16P		SRI Reducer	26P
	SRUI Reducing Union	6P		SUTI Union Tee	17P		SOSCI O-Seal Straight Thread Connector	27P
	SMCI Male Connector	7P		SRUTI Reducing Union Tee	18P		SOPCI O-Seal Pipe Thread Connector	27P
	SFCI Female Connector	8P		SMBTI Male Branch Tee	19P		SSMCI SAE/MS Male Connector	28P
	SGCI Gauge Connector	9P		SPMBTI Positionable Male Branch Tee	20P		SPWCI Male Pipe Weld Connector	29P
	SUEI Union Elbow	10P		SMRTI Male Run Tee	21P		SMPWEI Male Pipe Weld Elbow	29P
	SHMEI 45° Male Elbow	11P		SFBTI Female Branch Tee	22P		SSWCI Tube Socket Weld Connector	30P
	SMEI Male Elbow	12P		SFRTI Female Run Tee	23P		SSWEI Tube Socket Weld Elbow	30P
	SPHMEI 45° Positionable Male Elbow	13P		SUCI Union Cross	24P			
	SPMEI Positionable Male Elbow	14P		SAUI An Union	25P			




Tube Fitting that is:

The Most-Advanced
Chevron-Approved

Industry-Changing
BMT-Patented

Why i-Fitting is the Right choice?

Can you SEE the Leak Points?

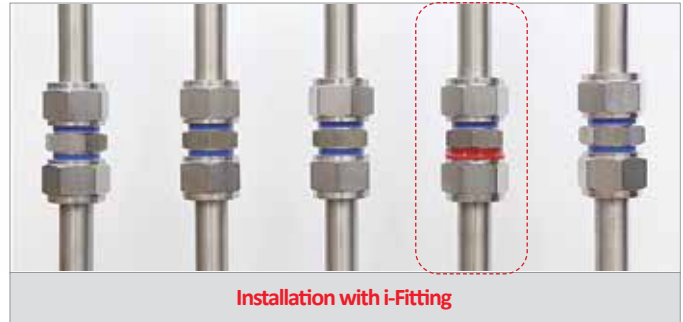


PERFECT CONNECTION can be SEEN, HEARD, FELT with this SAFEST fitting in the market!

Consistent and perfect installation can be made by anyone



Most tube fitting leaks are caused by improper installation. i-Fitting ensure a safe, quick, and precision connection every time. The “Check Ring”, which function as a built-in gap gauge, separates as a fitting is tightened to the exact point of perfect compression. This quality control and safety features reduce installer error attributed to unskilled work and assure consistent leak free connections.

Improvement of productivity and cost saving

i-Fitting enables efficient and safe installation by helping installers identify the status of installation simply by ‘seeing, hearing, and touching’. Upon completion of installation, additional inspection with separate tools such as gap-inspection gauge (which normally required for conventional tube fitting) is not required. i-Fitting, therefore, not only saves installation time but also minimizes overall quality costs by reducing errors.

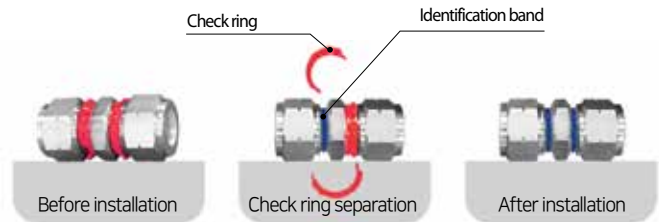

Structure

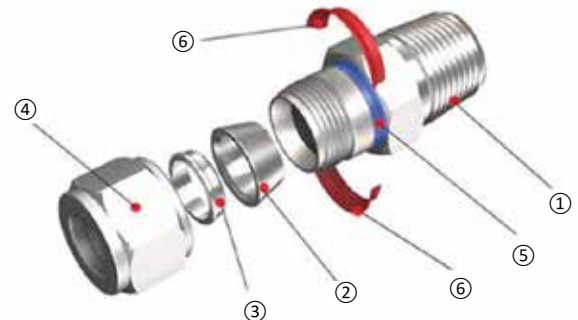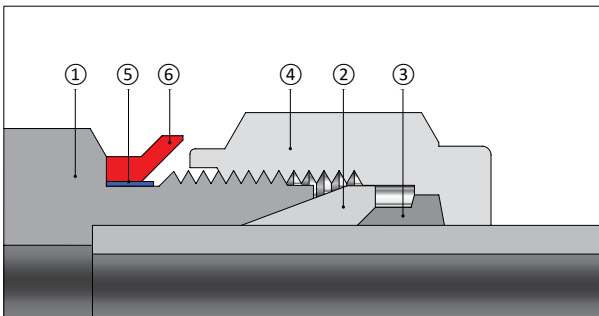

- ① Body
- ② Front Ferrule
- ④ Nut
- ⑤ Identification Bend*

- ③ Back Ferrule
- ⑥ Check Ring**

* Identification band: Blue for fractional (inch), Green for metric (mm)

** Check Ring: Red for fractional (inch), Yellow for metric (mm)


Features

- i-Fitting components include: body, front & back ferrule, nut, identification band, and check ring
- The check ring is essentially a built-in gap gauge, which separates when a fitting is tightened to the point of perfect compression
- Solves over- and under-tightening problems
- Increases installer safety in high pressure and dangerous chemical environments
- Improves productivity and reduces costs
- Industry changing, patented design by BMT
- Applicable to valve connections
- Sizes (Standard): 1/4 to 1 inches and 6mm to 25mm



Installation Instructions

- (1) Prepare for i-Fitting® consisting of body, nut, front/back ferrule, and check ring.
- (2) Fully insert the tube into i-Fitting® and against the shoulder; rotate the nut finger-tight until the tube will not turn by hand.
- (3) While holding the fitting body steady, tighten the nut until the check ring separates from the body. This separation of the check ring indicates the completion of installation.

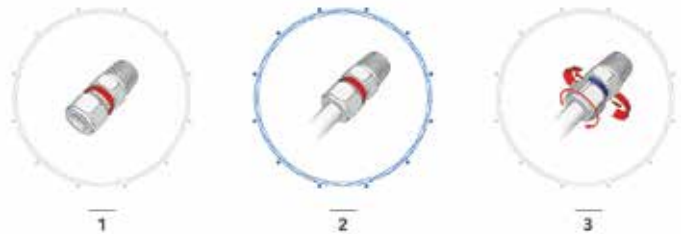

Ordering information

Example : $\frac{\text{SMCI}}{1} - \frac{8}{2} - \frac{8N}{2} - \frac{B}{3}$

1. Type of fitting

For i-Fitting "I" is used as a suffix to the type designator of SUPERLOK Tube Fitting.

(Example: SMC for SUPERLOK Male Connector
→ SMCI for i-Fitting Male Connector)

Please refer to i-Fitting type index on page 2.

Examples :

- **SUI** = i-fitting union
- **SMCI** = i-fitting male connector


2. Size of Fitting

Tube O.D (inch)	1/4	3/8	1/2	3/4	1
Designator	4	6	8	12	16
Tube O.D (mm)	6	10	12	20	25
Designator	6M	10M	12M	20M	25M

3. Material

- **SS(Blank)** = Stainless Steel
- **B** = Brass
- **AL** = Aluminum
- **15** = Carbon Steel
- **M40** = Monel Alloy 400
- **825** = Alloy 825
- **625** = Alloy 625
- **276** = Alloy C-276

SUI Union

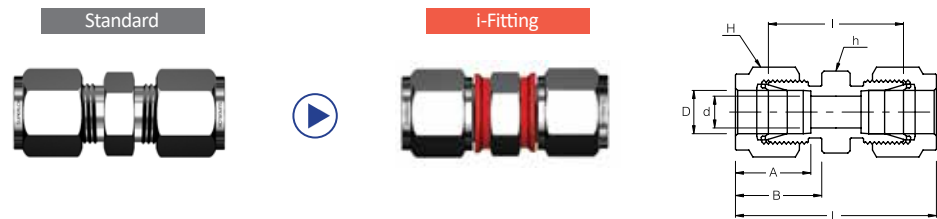


Connects Fractional Tubes

Part No.	Tube OD D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUI - 4	1/4	4.82	1/2	9/16	15.24	17.78	26.16	40.89
SUI - 6	3/8	7.11	5/8	11/16	16.76	19.30	30.22	44.95
SUI - 8	1/2	10.41	13/16	7/8	22.86	21.84	30.98	51.30
SUI - 12	3/4	15.74	1-1/16	1-1/8	24.38	21.84	33.27	53.59
SUI - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	40.38	64.77

Connects Metric Tubes

Part No.	Tube OD D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUI - 6M	6	4.8	14	14	15.3	17.7	26.2	41.0
SUI - 8M	8	6.4	15	16	16.2	18.6	28.2	43.2
SUI - 10M	10	7.9	18	19	17.2	19.5	31.0	46.2
SUI - 12M	12	9.5	22	22	22.8	22.0	31.0	51.2
SUI - 16M	16	12.7	24	25	24.4	22.0	31.8	52.0
SUI - 18M	18	15.1	27	30	24.4	22.0	33.3	53.5
SUI - 20M	20	15.9	30	32	26.0	22.0	34.8	55.0
SUI - 25M	25	21.8	35	38	31.3	26.5	40.4	65.0

SRUI Reducing Union

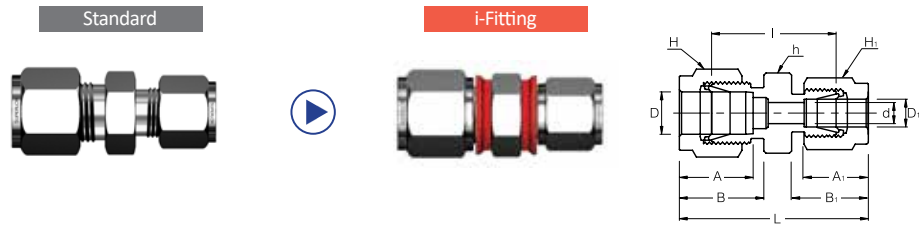

Connects Fractional Tubes

Part No.	Tube OD		d Min	Width Across Flat			A	A ₁	B	B ₁	I	L
	D (inch)	D ₁ (inch)		h (inch)	H (inch)	H ₁ (inch)						
SRUI - 6 - 4	3/8	1/4	4.82	5/8	11/16	9/16	16.76	15.24	19.30	17.78	28.44	43.18
SRUI - 8 - 4	1/2	1/4	4.82	13/16	7/8	9/16	22.86	15.24	21.84	17.78	29.46	46.99
SRUI - 8 - 6	1/2	3/8	7.11	13/16	7/8	11/16	22.86	16.76	21.84	19.30	30.98	48.51
SRUI - 12 - 4	3/4	1/4	4.82	1-1/16	1-1/8	9/16	24.38	15.24	21.84	17.78	31.75	49.27
SRUI - 12 - 6	3/4	3/8	7.11	1-1/16	1-1/8	11/16	24.38	16.76	21.84	19.30	33.27	50.80
SRUI - 12 - 8	3/4	1/2	10.41	1-1/16	1-1/8	7/8	24.38	22.86	21.84	21.84	33.27	53.59
SRUI - 16 - 8	1	1/2	10.41	1-3/8	1-1/2	7/8	31.24	22.86	26.41	21.84	39.50	63.24
SRUI - 16 - 12	1	3/4	15.74	1-3/8	1-1/2	1-1/8	31.24	24.38	26.41	21.84	39.00	62.73




Connects Metric Tubes

Part No.	Tube OD		d Min	Width Across Flat			A	A ₁	B	B ₁	I	L
	D	D ₁		h	H	H ₁						
SRUI - 8M - 6M	8	6	4.8	15	16	14	16.2	15.3	18.6	17.7	27.4	42.3
SRUI - 10M - 6M	10	6	4.8	18	19	14	17.2	15.3	19.5	17.7	29.5	44.5
SRUI - 10M - 8M	10	8	6.4	18	19	16	17.2	16.2	19.5	18.6	30.0	45.1
SRUI - 12M - 6M	12	6	4.8	22	22	14	22.8	15.3	22.0	17.7	29.5	47.0
SRUI - 12M - 8M	12	8	6.4	22	22	16	22.8	16.2	22.0	18.6	30.2	47.8
SRUI - 12M - 10M	12	10	7.9	22	22	19	22.8	17.2	22.0	19.5	31.0	48.7
SRUI - 16M - 12M	16	12	9.5	24	25	22	24.4	22.8	22.0	22.0	31.8	52.0
SRUI - 25M - 18M	25	18	15.1	35	38	30	31.3	24.4	26.5	22.0	38.6	61.0
SRUI - 25M - 20M	25	20	15.9	35	38	32	31.3	26.0	26.5	22.0	39.9	62.3

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SMCI

Male Connector

**Connects Fractional Tube To Female NPT Thread**

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SMCI - 4 - 6N	1/4	3/8	4.82	11/16	9/16	15.24	17.78	30.98	38.35
SMCI - 4 - 8N	1/4	1/2	4.82	7/8	9/16	15.24	17.78	37.33	44.70
SMCI - 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	32.51	39.87
SMCI - 6 - 6N	3/8	3/8	7.11	11/16	11/16	16.76	19.30	32.51	39.87
SMCI - 6 - 8N	3/8	1/2	7.11	7/8	11/16	16.76	19.30	38.86	46.22
SMCI - 8 - 4N	1/2	1/4	7.11	13/16	7/8	22.86	21.84	33.27	43.43
SMCI - 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	33.27	43.43
SMCI - 8 - 8N	1/2	1/2	10.41	7/8	7/8	22.86	21.84	38.86	49.02
SMCI - 8 - 12N	1/2	3/4	10.41	1-1/16	7/8	22.86	21.84	40.38	50.54
SMCI - 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	40.38	50.54
SMCI - 16 - 16N	1	1	22.35	1-3/8	1-1/2	31.24	26.41	50.03	62.23

Connects Metric Tube To Female ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L
				h	H				
SMCI - 6M - 2R	6	1/8	4.8	14	14	15.3	17.7	25.4	32.8
SMCI - 6M - 4R	6	1/4	4.8	14	14	15.3	17.7	30.5	37.9
SMCI - 6M - 6R	6	3/8	4.8	18	14	15.3	17.7	31.0	38.4
SMCI - 8M - 4R	8	1/4	6.4	15	16	16.2	18.6	31.2	38.7
SMCI - 8M - 6R	8	3/8	6.4	18	16	16.2	18.6	31.8	39.3
SMCI - 8M - 8R	8	1/2	6.4	22	16	16.2	18.6	38.1	45.6
SMCI - 10M - 6R	10	3/8	7.9	18	19	17.2	19.5	33.3	40.9
SMCI - 10M - 8R	10	1/2	7.9	22	19	17.2	19.5	38.9	46.5
SMCI - 12M - 8R	12	1/2	9.5	22	22	22.8	22.0	38.9	49.0
SMCI - 12M - 12R	12	3/4	9.5	27	22	22.8	22.0	40.4	50.5
SMCI - 16M - 8R	16	1/2	11.9	24	25	24.4	22.0	38.9	49.0
SMCI - 16M - 12R	16	3/4	12.7	27	25	24.4	22.0	40.4	50.5
SMCI - 18M - 8R	18	1/2	11.9	27	30	24.4	22.0	40.4	50.5
SMCI - 18M - 12R	18	3/4	15.1	27	30	24.4	22.0	40.4	50.5
SMCI - 20M - 8R	20	1/2	11.9	30	32	26.0	22.0	42.2	52.3
SMCI - 20M - 12R	20	3/4	15.9	30	32	26.0	22.0	42.2	52.3
SMCI - 25M - 12R	25	3/4	15.9	35	38	31.3	26.5	45.2	57.5
SMCI - 25M - 16R	25	1	21.8	35	38	31.3	26.5	50.0	62.3

- Dimensions and Drawings are for reference only and are subject to change without prior notice.

- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.


SFCI

Female Connector

Standard



i-Fitting



Connects Fractional Tubes To Male NPT Thread

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SFCI - 4 - 2N	1/4	1/8	4.82	9/16	9/16	15.24	17.78	23.87	31.24
SFCI - 4 - 4N	1/4	1/4	4.82	3/4	9/16	15.24	17.78	28.44	35.81
SFCI - 4 - 6N	1/4	3/8	4.82	7/8	9/16	15.24	17.78	30.22	37.59
SFCI - 4 - 8N	1/4	1/2	4.82	1-1/16	9/16	15.24	17.78	35.05	42.41
SFCI - 6 - 2N	3/8	1/8	7.11	5/8	11/16	16.76	19.30	25.40	32.76
SFCI - 6 - 4N	3/8	1/4	7.11	3/4	11/16	16.76	19.30	30.22	37.59
SFCI - 6 - 6N	3/8	3/8	7.11	7/8	11/16	16.76	19.30	31.75	39.11
SFCI - 6 - 8N	3/8	1/2	7.11	1-1/16	11/16	16.76	19.30	36.57	43.94
SFCI - 6 - 12N	3/8	3/4	7.11	1-5/16	11/16	16.76	19.30	40.38	47.75
SFCI - 8 - 4N	1/2	1/4	10.41	13/16	7/8	22.86	21.84	30.22	40.38
SFCI - 8 - 6N	1/2	3/8	10.41	7/8	7/8	22.86	21.84	31.75	41.91
SFCI - 8 - 8N	1/2	1/2	10.41	1-1/16	7/8	22.86	21.84	36.57	46.73
SFCI - 8 - 12N	1/2	3/4	10.41	1-5/16	7/8	22.86	21.84	38.10	48.26
SFCI - 12 - 8N	3/4	1/2	15.74	1-1/16	1-1/8	24.38	21.84	36.57	46.73
SFCI - 12 - 12N	3/4	3/4	15.74	1-5/16	1-1/8	24.38	21.84	38.10	48.26
SFCI - 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	41.14	53.34
SFCI - 16 - 16N	1	1	22.35	1-5/8	1-1/2	31.24	26.41	50.03	62.23

Connects Metric Tubes To Male ISO Thread Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L
				h	H				
SFCI - 6M - 2R	6	1/8	4.8	14	14	15.3	17.7	23.9	31.3
SFCI - 6M - 4R	6	1/4	4.8	19	14	15.3	17.7	28.4	35.8
SFCI - 6M - 6R	6	3/8	4.8	22	14	15.3	17.7	30.2	37.6
SFCI - 8M - 4R	8	1/4	6.4	19	16	16.2	18.6	29.5	37.0
SFCI - 8M - 6R	8	3/8	6.4	22	16	16.2	18.6	31.0	38.5
SFCI - 8M - 8R	8	1/2	6.4	27	16	16.2	18.6	35.8	43.3
SFCI - 10M - 6R	10	3/8	7.9	22	19	17.2	19.5	31.8	39.4
SFCI - 10M - 8R	10	1/2	7.9	27	19	17.2	19.5	36.6	44.2
SFCI - 12M - 8R	12	1/2	9.5	27	22	22.8	22.0	36.6	46.7
SFCI - 12M - 12R	12	3/4	9.5	35	22	22.8	22.0	38.9	49.0
SFCI - 16M - 8R	16	1/2	12.7	27	25	24.4	22.0	36.8	46.9
SFCI - 20M - 12R	20	3/4	15.9	35	32	26.0	22.0	39.6	49.7
SFCI - 25M - 12R	25	3/4	21.8	35	38	31.3	26.5	41.1	53.4
SFCI - 25M - 16R	25	1	21.8	41	38	31.3	26.5	50.0	62.3


- Dimensions and Drawings are for reference only and are subject to change without prior notice.

- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SGCI Gauge Connector

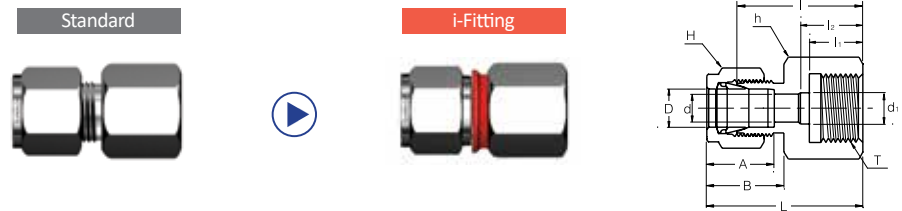

Connects Fractional Tubes To ISO Parallel Thread

Part No.	Tube OD D (inch)	T (PF)	d Min	d ₁	Width Across Flat		A	B	I	I ₁	I ₂	L
					h (inch)	H (inch)						
SGCI - 4 - 4G	1/4	1/4	4.82	5.58	3/4	9/16	15.24	17.78	30.22	13.00	17.00	37.59
SGCI - 4 - 6G	1/4	3/8	4.82	6.60	15/16	9/16	15.24	17.78	30.22	14.20	20.30	37.59
SGCI - 4 - 8G	1/4	1/2	4.82	6.60	1-1/16	9/16	15.24	17.78	36.07	18.80	24.90	43.43
SGCI - 6 - 4G	3/8	1/4	5.58	-	3/4	11/16	16.76	19.30	31.75	13.00	-	39.12
SGCI - 6 - 6G	3/8	3/8	6.60	-	15/16	11/16	16.76	19.30	31.24	14.20	-	38.61
SGCI - 6 - 8G	3/8	1/2	7.11	-	1-1/16	11/16	16.76	19.30	34.54	18.80	-	41.91
SGCI - 8 - 4G	1/2	1/4	5.58	-	7/8	7/8	22.86	21.84	31.80	13.00	-	41.95
SGCI - 8 - 6G	1/2	3/8	6.60	-	15/16	7/8	22.86	21.84	34.29	14.20	-	44.45
SGCI - 8 - 8G	1/2	1/2	7.11	7.11	1-1/16	7/8	22.86	21.84	38.10	18.80	-	48.26

Connects Metric Tubes To ISO Parallel Thread

Part No.	Tube OD D	T (PF)	d Min	d ₁	Width Across Flat		A	B	I	I ₁	I ₂	L
					h	H						
SGCI - 6M - 4G	6	1/4	4.8	5.5	19	14	15.3	17.7	30.2	13	17	37.6
SGCI - 6M - 6G	6	3/8	4.8	6.5	24	14	15.3	17.7	30.2	14	20	37.6
SGCI - 6M - 8G	6	1/2	4.8	7.0	27	14	15.3	17.7	36.1	19	25	43.5
SGCI - 8M - 4G	8	1/4	5.5	5.5	19	16	16.2	18.6	31.0	13	-	38.5
SGCI - 8M - 6G	8	3/8	6.5	6.5	24	16	16.2	18.6	28.7	14	-	36.2
SGCI - 8M - 8G	8	1/2	7.0	7.0	27	16	16.2	18.6	33.5	19	-	41.0
SGCI - 10M - 4G	10	1/4	5.5	5.5	19	19	17.2	19.5	31.8	13	-	39.4
SGCI - 10M - 6G	10	3/8	6.5	6.5	24	19	17.2	19.5	31.2	14	-	38.8
SGCI - 10M - 8G	10	1/2	7.0	7.0	27	19	17.2	19.5	34.5	19	-	42.1
SGCI - 12M - 4G	12	1/4	5.5	5.5	22	22	22.8	22.0	31.8	13	-	41.9
SGCI - 12M - 6G	12	3/8	6.5	6.5	24	22	22.8	22.0	34.3	14	-	44.4
SGCI - 12M - 8G	12	1/2	7.0	7.0	27	22	22.8	22.0	38.1	19	-	48.2
SGCI - 20M - 8G	20	1/2	7.0	7.0	30	32	26.0	22.0	44.2	19	-	54.3


- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SUEI
Union Elbow

Standard



i-Fitting




Connects Fractional Tubes

Part No.	Tube OD D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUEI - 4	1/4	4.82	1/2	9/16	15.24	17.78	20.10	27.40
SUEI - 6	3/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48
SUEI - 8	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06
SUEI - 12	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87
SUEI - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02

Connects Metric Tubes

Part No.	Tube OD D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUEI - 6M	6	4.8	12.7	14	15.3	17.7	19.6	27.0
SUEI - 8M	8	6.4	15.9	16	16.2	18.6	22.4	29.9
SUEI - 10M	10	7.9	17.5	19	17.2	19.5	23.9	31.5
SUEI - 12M	12	9.5	20.6	22	22.8	22.0	25.9	36.0
SUEI - 16M	16	12.7	23.8	25	24.4	22.0	27.9	38.0
SUEI - 18M	18	15.1	27.0	30	24.4	22.0	29.7	39.8
SUEI - 20M	20	15.9	34.9	32	26.0	22.0	34.5	44.6
SUEI - 25M	25	21.8	34.9	38	31.3	26.5	36.8	49.1

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

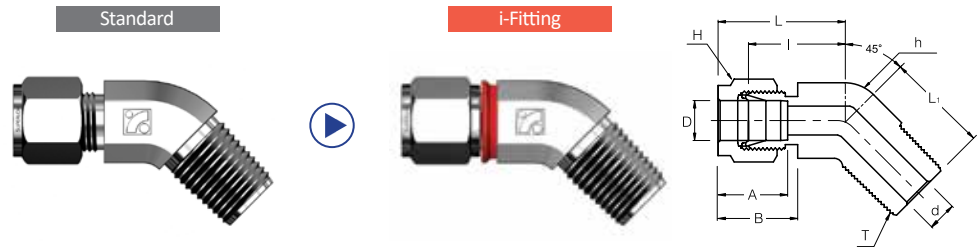SHMEI**45° Male Elbow****Connects Fractional Tubes To Female NPT Thread**

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SHMEI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	17.27	24.63	16.51
SHMEI - 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	17.27	24.63	21.08
SHMEI - 6 - 2N	3/8	1/8	4.82	5/8	11/16	16.76	19.30	20.57	27.94	18.28
SHMEI - 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	20.57	27.94	22.86
SHMEI - 6 - 6N	3/8	3/8	7.11	13/16	11/16	16.76	19.30	21.84	29.21	24.13
SHMEI - 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	21.84	32.00	24.13
SHMEI - 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	21.84	32.00	28.95

Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SHMEI - 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	17.3	24.6	16.5
SHMEI - 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	17.3	24.6	21.1
SHMEI - 12M - 6R	12	3/8	9.5	20.6	22	22.8	21.8	21.8	32.0	24.1
SHMEI - 12M - 8R	12	1/2	9.5	20.6	22	22.8	21.8	21.8	32.0	29.0

- Dimensions and Drawings are for reference only and are subject to change without prior notice.

- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.


SMEI

Male Elbow

Standard



i-Fitting



Connects Fractional Tube To Female NPT Thread

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SMEI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SMEI - 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SMEI - 4 - 6N	1/4	3/8	4.82	5/8	9/16	15.24	17.78	22.35	29.71	26.16
SMEI - 4 - 8N	1/4	1/2	4.82	13/16	9/16	15.24	17.78	24.38	31.75	33.02
SMEI - 6 - 2N	3/8	1/8	4.82	5/8	11/16	16.76	19.30	23.11	30.48	20.82
SMEI - 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SMEI - 6 - 6N	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.87	31.24	26.16
SMEI - 6 - 8N	3/8	1/2	7.11	13/16	11/16	16.76	19.30	25.90	33.27	33.02
SMEI - 6 - 12N	3/8	3/4	7.11	1-1/16	11/16	16.76	19.30	29.71	37.08	36.83
SMEI - 8 - 4N	1/2	1/4	7.11	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SMEI - 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SMEI - 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06	33.02
SMEI - 8 - 12N	1/2	3/4	10.41	1-1/16	7/8	22.86	21.84	29.71	39.87	36.83
SMEI - 12 - 8N	3/4	1/2	11.93	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83
SMEI - 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83
SMEI - 16 - 12N	1	3/4	15.74	1-3/8	1-1/2	31.24	26.41	36.83	49.02	41.65
SMEI - 16 - 16N	1	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	46.48

Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SMEI - 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SMEI - 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SMEI - 6M - 6R	6	3/8	4.8	15.9	14	15.3	17.7	22.4	29.8	26.2
SMEI - 8M - 4R	8	1/4	6.4	14.3	16	16.2	18.6	21.3	28.8	24.4
SMEI - 8M - 6R	8	3/8	6.4	15.9	16	16.2	18.6	23.1	30.6	26.2
SMEI - 8M - 8R	8	1/2	6.4	20.6	16	16.2	18.6	25.1	32.6	33.0
SMEI - 10M - 6R	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	26.2
SMEI - 10M - 8R	10	1/2	7.9	20.6	19	17.2	19.5	25.9	33.5	33.0
SMEI - 12M - 8R	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SMEI - 12M - 12R	12	3/4	9.5	27.0	22	22.8	22.0	29.7	39.8	36.8
SMEI - 16M - 8R	16	1/2	11.9	23.8	25	24.4	22.0	27.9	38.0	35.1
SMEI - 18M - 8R	18	1/2	11.9	27.0	30	24.4	22.0	29.7	39.8	36.8
SMEI - 18M - 12R	18	3/4	15.1	27.0	30	24.4	22.0	29.7	39.8	36.8
SMEI - 20M - 8R	20	1/2	11.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SMEI - 20M - 12R	20	3/4	15.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SMEI - 25M - 12R	25	3/4	15.9	34.9	38	31.3	26.5	36.8	49.1	41.7
SMEI - 25M - 16R	25	1	21.8	34.9	38	31.3	26.5	36.8	49.1	46.5

- Dimensions and Drawings are for reference only and are subject to change without prior notice.


- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SPHMEI

45° Positionable
Male Elbow

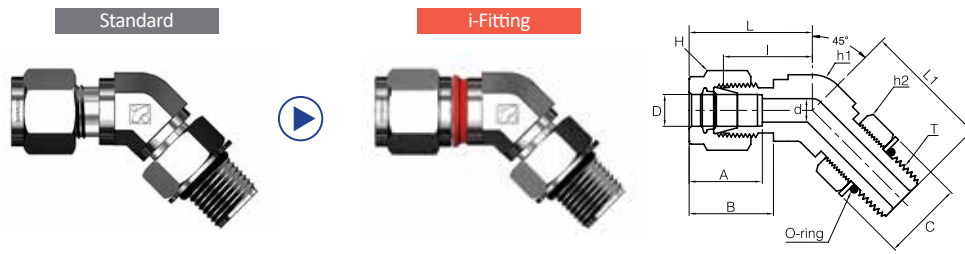

Connects Fractional Tubes To SAE/MS Straight Thread

Part No.	Tube OD D (inch)	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPHMEI - 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	18.29	25.64	25.65	16.51
SPHMEI - 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	20.57	27.94	28.19	20.07
SPHMEI - 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	21.84	32.00	32.26	25.65
SPHMEI - 12 - 12U	3/4	1-1/16-12	15.75	1-1/8	1-1/4	1-1/8	24.38	24.84	29.72	39.88	47.24	36.58
SPHMEI - 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	35.31	47.50	50.55	43.94


Connects Metric Tubes To SAE/MS Straight Thread

Part No.	Tube OD D	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPHMEI - 6M - 4U	6	7/16-20	4.8	12.7	14.3	14	15.2	17.7	18.3	25.6	25.6	16.5
SPHMEI - 12M - 8U	12	3/4-16	9.5	20.6	22.2	22	22.8	21.8	21.8	32.0	32.2	25.6
SPHMEI - 18M - 12U	18	1-1/16-12	15.1	28.6	31.7	30	24.3	24.8	29.7	39.8	47.2	36.6
SPHMEI - 25M - 16U	25	1-5/16-12	21.8	34.9	38.1	38	31.2	26.4	35.3	47.5	50.5	43.9

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
 - Unless otherwise specified, all dimensions are in millimeters.
 - Sizes, pressure classes, and end connections not listed are available upon request.
 - Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SPMEI

Positionable
Male Elbow

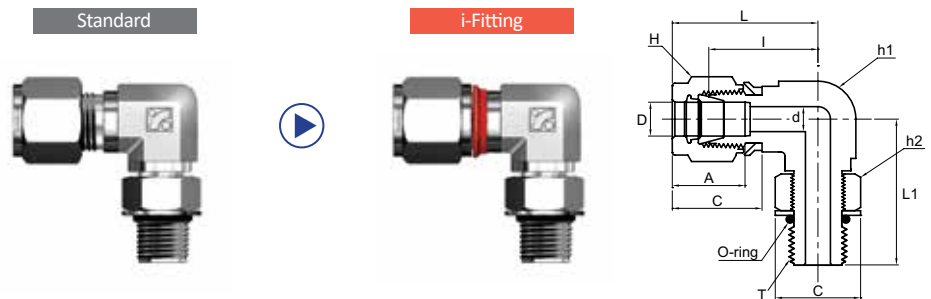


Connects Fractional Tubes To SAE/MS Straight Thread

Part No.	Tube OD D (inch)	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPMEI - 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	21.08	28.45	28.45	16.51
SPMEI - 4 - 6U	1/4	9/16-18	4.83	5/8	11/16	9/16	15.24	17.78	23.11	30.48	32.26	20.07
SPMEI - 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	24.64	32.00	32.26	20.07
SPMEI - 6 - 8U	3/8	3/4-16	7.11	13/16	7/8	11/16	16.76	19.30	27.43	34.80	37.85	25.65
SPMEI - 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	27.43	37.59	37.85	25.65
SPMEI - 12 - 12U	3/4	1-1/16-12	15.75	1-1/16	1-1/4	1-1/8	24.38	24.84	31.24	41.40	48.77	36.58
SPMEI - 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	38.35	50.55	53.59	43.94

Connects Metric Tubes To SAE/MS Straight Thread

Part No.	Tube OD D	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMEI - 6M - 4U	6	7/16-20	4.8	12.7	14.3	14	15.2	17.7	21.1	28.4	28.6	16.5
SPMEI - 12M - 8U	12	3/4-16	9.5	20.6	22.2	22	22.8	21.8	27.4	37.5	37.6	25.6
SPMEI - 18M - 12U	18	1-1/16-12	15.1	27	31.7	30	24.3	24.8	31.2	41.4	48.8	36.5
SPMEI - 25M - 16U	25	1-5/16-12	21.8	34.9	38.1	38	31.2	26.4	38.4	50.5	53.6	43.9

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

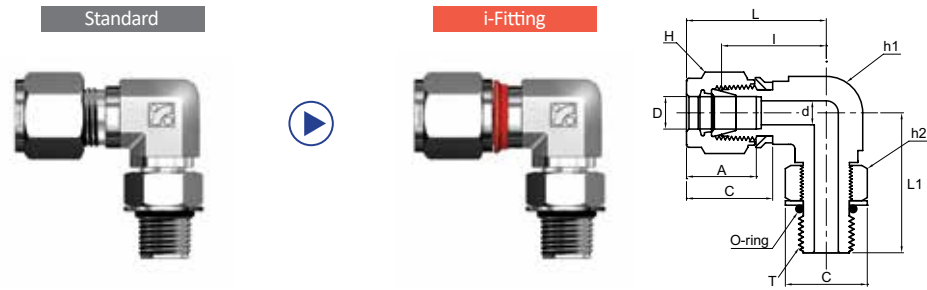SPMEIPositionable
Male Elbow**Connects Fractional Tubes To Female ISO Parallel Thread**

Part No.	Tube OD D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPMEI - 4 - 2G	1/4	1/8	4.06	1/2	9/16	9/16	15.24	17.78	19.56	26.92	26.42	17.27
SPMEI - 4 - 4G	1/4	1/4	4.83	5/8	3/4	9/16	15.24	17.78	21.59	28.96	32.26	22.86
SPMEI - 6 - 4G	3/8	1/4	5.84	5/8	3/4	11/16	16.76	19.30	23.11	30.48	32.26	22.86
SPMEI - 6 - 6G	3/8	3/8	7.11	13/16	7/8	11/16	16.76	19.30	25.91	33.27	37.08	26.42
SPMEI - 8 - 4G	3/8	1/4	5.84	13/16	3/4	7/8	22.86	21.84	25.91	36.07	35.05	26.42
SPMEI - 8 - 6G	1/2	3/8	7.87	13/16	7/8	7/8	22.86	21.84	25.91	36.07	37.08	22.86
SPMEI - 8 - 8G	1/2	1/2	10.41	15/16	1-1/16	7/8	22.86	21.84	27.94	38.10	43.43	26.42
SPMEI - 12 - 8G	3/4	1/2	11.94	1-1/16	1-1/16	1-1/8	24.38	21.84	29.72	39.88	45.21	32.00
SPMEI - 12 - 12G	3/4	3/4	15.75	1-1/16	1-3/8	1-1/8	24.38	21.84	29.72	39.88	48.77	41.15
SPMEI - 16 - 12G	1	3/4	15.75	1-3/8	1-3/8	1-1/2	31.24	26.42	36.83	49.02	53.34	41.15
SPMEI - 16 - 16G	1	1	19.81	1-3/8	1-5/8	1-1/2	31.24	26.42	36.83	49.02	53.59	48.51

Connects Metric Tubes To Female ISO Parallel Thread

Part No.	Tube OD D	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMEI - 6M - 2G	6	1/8	4.0	12.7	14.3	14	15.3	17.7	19.6	27.0	26.4	17.3
SPMEI - 6M - 4G	6	1/4	4.8	22.2	19	14	15.3	17.7	21.6	29.0	32.3	22.9
SPMEI - 8M - 2G	8	1/8	4.0	14.3	14.3	16	16.2	18.6	21.3	28.8	27.4	17.3
SPMEI - 8M - 4G	8	1/4	5.9	22.2	19	16	16.2	18.6	22.4	29.9	32.2	22.9
SPMEI - 10M - 4G	10	1/4	5.9	20.6	19	19	17.2	19.5	25.9	33.5	35.0	22.9
SPMEI - 10M - 6G	10	3/8	7.9	20.6	22.2	19	17.2	19.5	25.9	33.5	37.1	26.4
SPMEI - 12M - 4G	12	1/4	5.9	20.6	19	22	22.8	22.0	25.9	36.0	35.0	22.9
SPMEI - 12M - 8G	12	1/2	9.5	23.8	27	22	22.8	22.0	27.9	38.0	43.4	32.0
SPMEI - 12M - 12G	12	3/4	9.5	27	34.9	22	22.8	22.0	29.7	39.8	48.8	41.1

- Dimensions and Drawings are for reference only and are subject to change without prior notice.


- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SFEI

Female Elbow



Connects Fractional Tubes To Male NPT Thread

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SFEI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	19.05
SFEI - 4 - 4N	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
SFEI - 4 - 6N	1/4	3/8	4.82	13/16	9/16	15.24	17.78	24.38	31.75	22.35
SFEI - 4 - 8N	1/4	1/2	4.82	1	9/16	15.24	17.78	27.17	34.54	28.44
SFEI - 6 - 2N	3/8	1/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48	19.05
SFEI - 6 - 4N	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.87	31.24	22.35
SFEI - 6 - 6N	3/8	3/8	7.11	13/16	11/16	16.76	19.30	25.90	33.27	22.35
SFEI - 6 - 8N	3/8	1/2	7.11	1	11/16	16.76	19.30	28.70	36.06	28.44
SFEI - 8 - 4N	1/2	1/4	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFEI - 8 - 6N	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFEI - 8 - 8N	1/2	1/2	10.41	1	7/8	22.86	21.84	28.70	38.86	37.00
SFEI - 12 - 8N	3/4	1/2	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	28.44
SFEI - 12 - 12N	3/4	3/4	15.74	1-3/8	1-1/8	24.38	21.84	34.54	44.70	31.75
SFEI - 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	31.75
SFEI - 16 - 16N	1	1	22.35	1-11/16	1-1/2	31.24	26.41	41.40	53.59	38.10


Connects Metric Tubes To Male ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SFEI - 6M - 4R	6	1/4	4.8	17.4	14	15.3	17.7	22.4	29.8	22.40
SFEI - 6M - 6R	6	3/8	4.8	20.6	14	15.3	17.7	24.4	31.7	22.40
SFEI - 6M - 8R	6	1/2	4.8	25.4	14	15.3	17.7	27.2	34.6	28.40
SFEI - 8M - 4R	8	1/4	6.4	17.4	16	16.2	18.6	23.1	30.6	22.40
SFEI - 8M - 8R	8	1/2	6.4	25.4	16	16.2	18.6	28.0	35.2	28.40
SFEI - 10M - 4R	10	1/4	7.9	17.4	19	17.2	19.5	25.9	33.5	22.40
SFEI - 10M - 6R	10	3/8	7.9	20.6	19	17.2	19.5	25.9	33.5	22.40
SFEI - 12M - 6R	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.2	22.35
SFEI - 12M - 8R	12	1/2	9.5	25.4	22	22.8	22.0	28.7	38.8	28.40

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SUTI

Union Tee

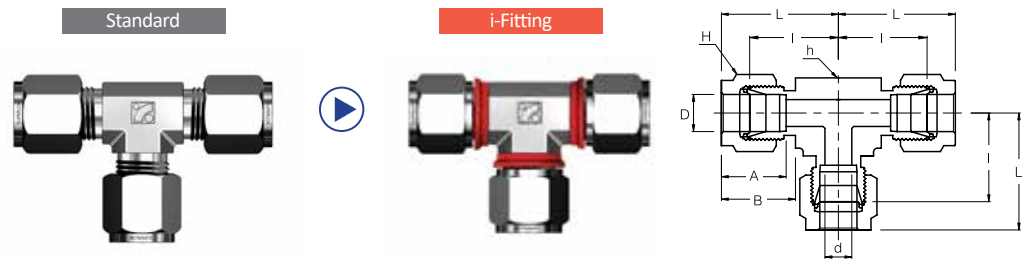**Connects Fractional Tubes**

Part No.	Tube OD D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUTI - 4	1/4	4.82	1/2	9/16	15.24	17.78	20.10	27.40
SUTI - 6	3/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48
SUTI - 8	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06
SUTI - 12	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87
SUTI - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02

Connects Metric Tubes

Part No.	Tube OD D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUTI - 6M	6	4.8	12.7	14	15.3	17.7	19.6	27.0
SUTI - 8M	8	6.4	15.9	16	16.2	18.6	22.4	29.9
SUTI - 10M	10	7.9	17.5	19	17.2	19.5	23.9	31.5
SUTI - 12M	12	9.5	20.6	22	22.8	22.0	25.9	36.0
SUTI - 16M	16	12.7	25.4	25	24.4	22.0	28.7	38.8
SUTI - 18M	18	15.1	27.0	30	24.4	22.0	29.7	38.8
SUTI - 20M	20	15.9	34.9	32	26.0	22.0	34.5	44.6
SUTI - 25M	25	21.8	34.9	38	31.3	26.5	36.8	49.1


- Dimensions and Drawings are for reference only and are subject to change without prior notice.

- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SRUTI Reducing Union Tee

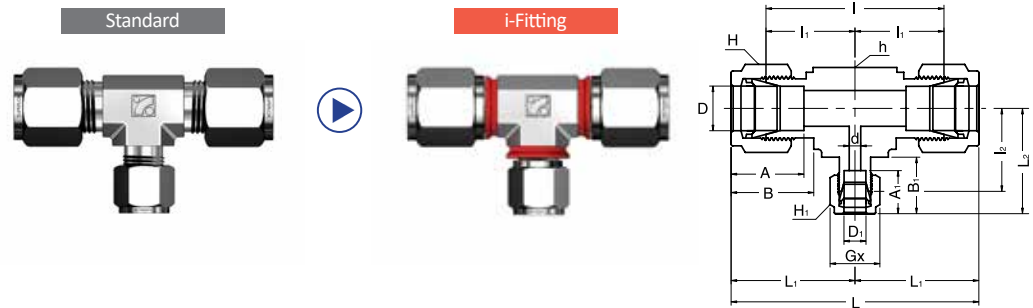

Connects Fractional Tubes

Part No.	Tube OD		d Min	Width Across Flat			A	A ₁	B	B ₁	I	I ₁	I ₂	L	L ₁	L ₂
	D (inch)	D ₁ (inch)		h (inch)	H (inch)	H ₁ (inch)										
SRUTI - 6 - 4	3/8	1/4	4.82	5/8	11/16	9/16	16.76	15.24	19.30	17.78	46.22	23.11	21.59	60.96	30.48	28.95
SRUTI - 8 - 4	1/2	1/4	4.82	13/16	7/8	9/16	22.86	15.24	21.84	17.78	51.81	25.90	24.38	72.13	36.06	31.75
SRUTI - 8 - 6	1/2	3/8	7.11	13/16	7/8	11/16	22.86	16.76	21.84	19.30	51.81	25.90	25.90	72.13	36.06	33.27
SRUTI - 12 - 6	3/4	3/8	7.11	1 1/16	1 1/8	11/16	24.38	16.76	21.84	19.30	59.43	29.71	29.71	79.75	39.87	37.08
SRUTI - 12 - 8	3/4	1/2	10.41	1 1/16	1 1/8	7/8	24.38	22.86	21.84	21.84	59.43	29.71	29.71	79.75	39.87	39.87
SRUTI - 16 - 6	1	3/8	7.11	1 3/8	1 1/2	1 1/16	31.24	16.76	26.41	19.30	73.66	36.83	34.54	98.04	49.02	41.91
SRUTI - 16 - 8	1	1/2	10.41	1 3/8	1 1/2	7/8	31.24	21.84	26.41	22.86	73.66	36.83	34.54	98.04	49.02	44.70
SRUTI - 16 - 12	1	3/4	15.74	1 3/8	1 1/2	1 1/8	31.24	24.38	26.41	21.84	73.66	36.83	34.54	98.04	49.02	44.70


Connects Metric Tubes

Part No.	Tube OD		d Min	Width Across Flat			A	A ₁	B	B ₁	I	I ₁	I ₂	L	L ₁	L ₂
	D	D ₁		h	H	H ₁										
SRUTI - 8M - 6M	8	6	4.8	15.9	16	14	16.8	15.3	19.2	17.8	46.2	23.1	21.6	62.4	31.2	29.0
SRUTI - 12M - 6M	12	6	4.8	20.6	22	14	23.0	15.3	22.0	17.8	51.8	25.9	25.9	72.5	36.2	33.3
SRUTI - 12M - 8M	12	8	6.4	20.6	22	16	23.0	16.8	22.0	19.2	51.8	25.9	25.1	72.5	36.2	33.2
SRUTI - 12M - 10M	12	10	7.9	20.6	22	19	23.0	17.5	22.0	19.8	51.8	25.9	25.9	72.5	36.2	33.8
SRUTI - 18M - 10M	18	10	7.9	27.0	30	19	24.8	17.5	22.5	19.8	59.4	29.7	29.7	81.7	40.3	37.6
SRUTI - 18M - 12M	18	12	9.5	27.0	30	22	24.8	23.0	25.5	22.2	59.4	29.7	29.7	80.7	40.3	40.0
SRUTI - 25M - 12M	25	12	9.5	34.9	38	22	31.3	23.0	26.6	22.2	73.6	36.8	34.5	98.2	49.1	44.8
SRUTI - 25M - 18M	25	18	15.1	34.9	38	30	31.3	24.8	26.6	22.5	73.6	36.8	34.5	98.2	49.1	45.1
SRUTI - 25M - 20M	25	20	15.9	34.9	38	32	31.3	26.6	26.6	22.6	73.6	36.8	34.5	98.2	49.1	45.2

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SMBTI

Male
Branch Tee

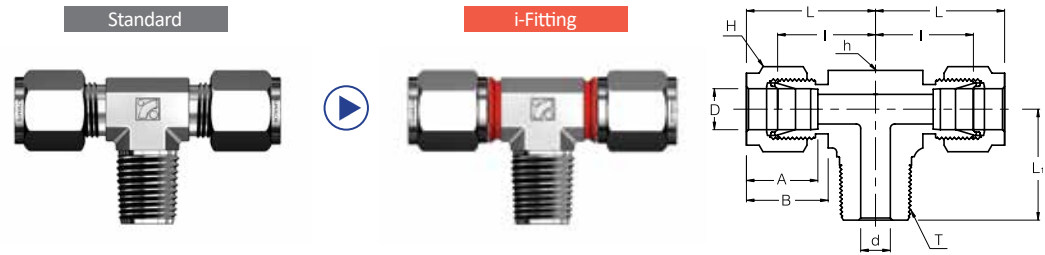

Connects Fractional Tubes To Female NPT Thread


Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SMBTI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SMBTI - 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SMBTI - 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SMBTI - 6 - 6N	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.10	30.48	28.19
SMBTI - 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SMBTI - 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06	33.02
SMBTI - 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83

Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SMBTI - 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SMBTI - 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SMBTI - 8M - 4R	8	1/4	6.4	15.9	16	16.2	18.6	22.4	29.9	25.4
SMBTI - 10M - 4R	10	1/4	7.1	17.5	19	17.2	19.5	23.9	31.5	28.2
SMBTI - 10M - 6R	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	28.2
SMBTI - 12M - 4R	12	1/4	7.1	20.6	22	22.8	22.0	25.9	36.0	28.2
SMBTI - 12M - 6R	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.0	28.2
SMBTI - 12M - 8R	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SMBTI - 16M - 6R	16	3/8	9.5	25.4	25	24.4	22.0	27.9	38.0	30.2
SMBTI - 16M - 8R	16	1/2	11.9	25.4	25	24.4	22.0	27.9	38.0	35.1
SMBTI - 20M - 12R	20	3/4	15.9	31.8	32	26.0	22.0	34.5	44.6	41.7

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
 - Unless otherwise specified, all dimensions are in millimeters.
 - Sizes, pressure classes, and end connections not listed are available upon request.
 - Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SPMBTI
Positionable
Male Branch Tee

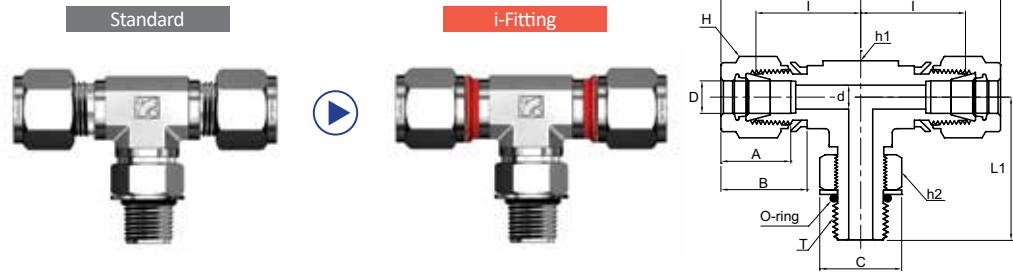

Connects Fractional Tubes To Female ISO Parallel Thread

Part No.	Tube OD D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPMBTI - 4 - 2G	1/4	1/8	4.06	1/2	9/16	9/16	15.24	17.78	19.56	26.92	26.42	17.27
SPMBTI - 4 - 4G	1/4	1/4	4.83	5/8	3/4	9/16	15.24	17.78	21.59	28.96	32.26	22.86
SPMBTI - 6 - 4G	3/8	1/4	5.08	5/8	3/4	11/16	15.24	19.30	23.11	30.48	32.26	22.86
SPMBTI - 8 - 6G	3/8	3/8	7.87	13/16	7/8	7/8	22.86	21.84	25.91	36.07	37.08	26.42
SPMBTI - 8 - 8G	1/2	1/2	10.41	15/16	1-1/16	7/8	22.86	21.84	27.94	38.10	43.43	32.00
SPMBTI - 12 - 8G	3/4	1/2	11.94	1-1/16	1-1/16	1-1/8	24.38	21.84	29.72	39.88	45.21	32.00
SPMBTI - 12 - 12G	3/4	3/4	15.75	1-1/16	1-3/8	1-1/8	24.38	21.84	29.72	39.88	48.77	41.15
SPMBTI - 16 - 16G	1	1	19.81	1-3/8	1-5/8	1-1/2	31.24	26.42	36.83	49.02	53.59	48.51

Connects Metric Tubes To Female ISO Parallel Thread

Part No.	Tube OD D	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMBTI - 6M - 2G	6	1/8	4.0	12.7	14.3	14	15.3	17.7	19.6	27.0	26.4	17.3
SPMBTI - 6M - 4G	6	1/4	4.8	15.8	19	14	15.3	17.7	21.6	29.0	32.3	22.9
SPMBTI - 8M - 2G	8	1/8	4.0	14.3	14.3	16	16.2	18.6	21.3	28.8	27.4	17.3
SPMBTI - 8M - 4G	8	1/4	5.9	15.8	19	16	16.2	18.6	22.4	29.9	32.2	22.9
SPMBTI - 10M - 4G	10	1/4	5.9	20.6	19	19	17.2	19.5	25.9	33.5	35.0	22.9
SPMBTI - 12M - 8G	12	1/2	9.5	23.8	27	22	22.8	22.0	27.9	38.0	35.0	32.0

Connects Fractional Tubes To SAE/MS Straight Thread Boss

Part No.	Tube OD D (inch)	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPMBTI - 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	21.08	28.45	28.45	16.51
SPMBTI - 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	24.64	32.00	32.26	20.07
SPMBTI - 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	27.43	37.59	37.85	25.65
SPMBTI - 12 - 12U	3/4	1-1/16-12	15.75	1-1/16	1-1/4	1-1/8	24.38	21.84	31.24	41.40	48.77	36.58
SPMBTI - 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	38.35	50.55	53.59	43.94

Connects Metric Tubes To SAE/MS Straight Thread Boss

Part No.	Tube OD D	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMBTI - 6M - 4U	6	7/16-20	4.8	12.7	14.3	14	15.2	17.7	21.1	28.4	28.5	16.5
SPMBTI - 12M - 8U	12	3/4-16	9.5	20.6	22.2	22	22.8	21.8	27.4	37.5	37.9	25.6
SPMBTI - 18M - 12U	18	1-1/16-12	15.1	27	31.7	28	24.3	21.8	31.2	41.4	48.8	36.5
SPMBTI - 25M - 16U	25	1-5/16-12	21.8	34.9	38.1	38	31.2	26.4	38.4	50.5	53.6	43.9

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
 - Unless otherwise specified, all dimensions are in millimeters.
 - Sizes, pressure classes, and end connections not listed are available upon request.
 - Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SMRTI

Male Run Tee

**Connects Fractional Tubes To Female NPT Thread**

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SMRTI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SMRTI - 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SMRTI - 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SMRTI - 6 - 6N	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.10	30.48	28.19
SMRTI - 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SMRTI - 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06	33.02
SMRTI - 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83

Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SMRTI - 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SMRTI - 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SMRTI - 8M - 4R	8	1/4	6.4	15.9	16	16.2	18.6	22.4	29.9	25.4
SMRTI - 10M - 4R	10	1/4	7.1	17.5	19	17.2	19.5	23.9	31.5	28.2
SMRTI - 10M - 6R	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	28.2
SMRTI - 12M - 4R	12	1/4	7.1	20.6	22	22.8	22.0	25.9	36.0	28.2
SMRTI - 12M - 8R	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SMRTI - 16M - 6R	16	3/8	9.5	25.4	25	24.4	22.0	27.9	38.0	30.2
SMRTI - 16M - 8R	16	1/2	11.9	25.4	25	24.4	22.0	27.9	38.0	35.1
SMRTI - 20M - 12R	20	3/4	15.9	31.8	32	26.0	22.0	34.5	44.6	41.7

- Dimensions and Drawings are for reference only and are subject to change without prior notice.


- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SFBTI

Female
Branch Tee

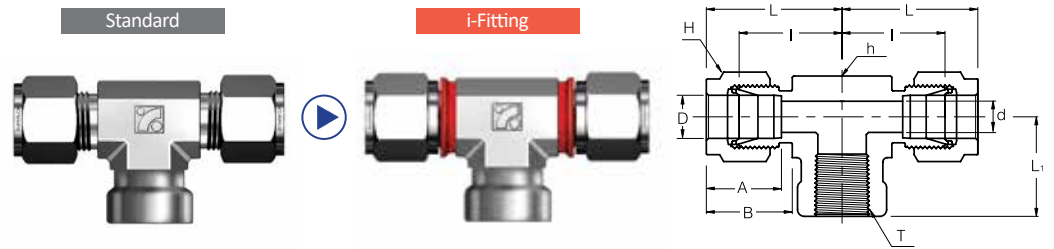

Connects Fractional Tubes To Male NPT Thread

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SFBTI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	19.05
SFBTI - 4 - 4N	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
SFBTI - 6 - 4N	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.87	31.24	22.35
SFBTI - 6 - 6N	3/8	3/8	7.11	13/16	11/16	16.76	19.30	25.90	33.27	22.35
SFBTI - 6 - 8N	3/8	1/2	7.11	1	11/16	16.76	19.30	28.70	36.07	28.45
SFBTI - 8 - 4N	1/2	1/4	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFBTI - 8 - 6N	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFBTI - 8 - 8N	1/2	1/2	10.41	1	7/8	22.86	21.84	28.70	38.86	28.44
SFBTI - 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	31.75
SFBTI - 16 - 16N	1	1	22.35	1-11/16	1-1/2	31.24	26.41	41.40	53.59	38.10

Connects Metric Tubes To Male ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SFBTI - 6M - 4R	6	1/4	4.8	17.46	14	15.3	17.7	22.4	29.8	22.4
SFBTI - 6M - 6R	6	3/8	4.8	20.63	14	15.3	17.7	24.4	31.7	22.4
SFBTI - 6M - 8R	6	1/2	4.8	25.40	14	15.3	17.7	27.2	34.5	28.4
SFBTI - 8M - 2R	8	1/8	6.4	15.87	16	16.2	18.6	22.4	29.9	19.0
SFBTI - 8M - 4R	8	1/4	6.4	17.46	16	16.2	18.6	23.1	30.6	22.4
SFBTI - 8M - 6R	8	3/8	6.4	20.63	16	16.2	18.6	25.2	32.4	22.4
SFBTI - 8M - 8R	8	1/2	6.4	25.40	16	16.2	18.6	28.0	35.2	28.4
SFBTI - 10M - 4R	10	1/4	7.9	20.63	19	17.2	19.5	25.9	33.5	22.4
SFBTI - 12M - 4R	12	1/4	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
SFBTI - 12M - 6R	12	3/8	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
SFBTI - 16M - 8R	16	1/2	12.7	25.40	25	24.4	22.0	28.7	38.8	28.4

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SFRTI

Female Run Tee

**Connects Fractional Tubes To Male NPT Thread**

Part No.	Tube OD D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SFRTI - 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	19.05
SFRTI - 4 - 4N	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
SFRTI - 6 - 4N	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.87	31.24	22.35
SFRTI - 8 - 6N	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFRTI - 8 - 8N	1/2	1/2	10.41	1	7/8	22.86	21.84	28.70	39.87	28.44
SFRTI - 12 - 12N	3/4	3/4	15.74	1-3/8	1-1/8	24.38	21.84	34.54	44.70	31.75
SFRTI - 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	31.75
SFRTI - 16 - 16N	1	1	22.35	1-11/16	1-1/2	31.24	26.41	41.40	53.59	38.10

Connects Metric Tubes To Male ISO Tapered Thread

Part No.	Tube OD D	T (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SFRTI - 6M - 4R	6	1/4	4.8	17.4	14	15.3	17.7	22.4	29.8	22.4
SFRTI - 6M - 8R	6	1/2	4.8	25.4	14	15.3	17.7	27.2	34.5	28.4
SFRTI - 8M - 2R	8	1/8	6.4	15.8	16	16.2	18.6	22.4	29.9	19.0
SFRTI - 8M - 4R	8	1/4	6.4	17.4	16	16.2	18.6	23.1	30.6	22.4
SFRTI - 8M - 6R	8	3/8	6.4	20.6	16	16.2	18.6	25.2	32.4	22.4
SFRTI - 8M - 8R	8	1/2	6.4	25.4	16	16.2	18.6	28.0	35.2	28.4
SFRTI - 12M - 4R	12	1/4	9.5	20.6	22	22.8	22.0	25.9	33.5	22.4
SFRTI - 12M - 6R	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.0	22.4
SFRTI - 16M - 8R	16	1/2	12.7	25.4	25	24.4	22.0	29.7	39.8	28.4


- Dimensions and Drawings are for reference only and are subject to change without prior notice.

- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SUCI
Union Cross

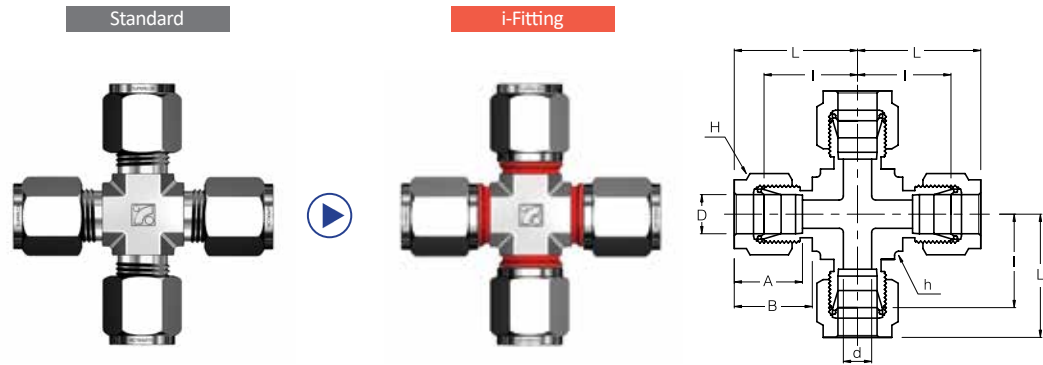

Connects Fractional Tubes


Part No.	Tube OD D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUCI - 4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92
SUCI - 6	3/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48
SUCI - 8	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06
SUCI - 12	3/4	15.74	1	1-1/8	24.38	21.84	29.71	39.87
SUCI - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02

Connects Metric Tubes

Part No.	Tube OD D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUCI - 6M	6	4.8	12.7	14	15.3	17.7	19.6	27.0
SUCI - 8M	8	6.4	15.9	16	16.2	18.6	22.4	29.9
SUCI - 10M	10	7.9	20.6	19	17.2	19.5	25.9	33.5
SUCI - 12M	12	9.5	20.6	22	22.8	22.0	25.9	36.0
SUCI - 16M	16	12.7	23.8	25	24.4	22.0	26.9	37.0
SUCI - 18M	18	15.1	25.4	30	24.4	22.0	28.2	38.3
SUCI - 20M	20	15.9	34.9	32	26.0	22.0	34.5	44.6
SUCI - 25M	25	21.8	34.9	38	31.3	26.5	36.8	49.1

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
 - Unless otherwise specified, all dimensions are in millimeters.
 - Sizes, pressure classes, and end connections not listed are available upon request.
 - Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SAUI
An Union

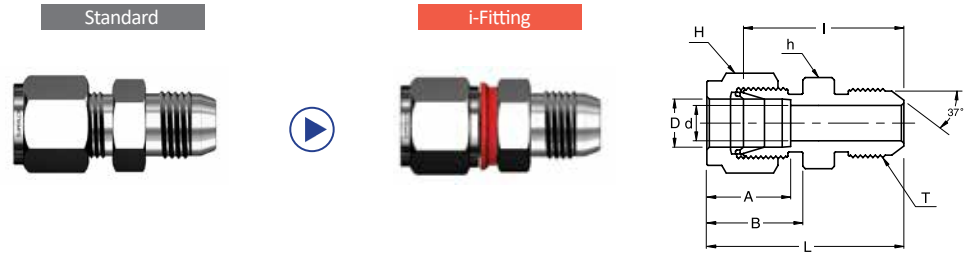

Connects Fractional Tubes To An Flared Tubes

Part No.	Tube OD (inch)	AN Tube Flare Size (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	L
					h (inch)	H (inch)				
SAUI - 4 - 4U	1/4	1/4	7/16-20	4.31	1/2	9/16	15.24	17.78	30.22	37.59
SAUI - 6 - 4U	3/8	1/4	7/16-20	4.31	5/8	11/16	16.76	19.30	32.25	39.62
SAUI - 6 - 6U	3/8	3/8	9/16-18	7.11	5/8	11/16	16.76	19.30	32.25	39.62
SAUI - 8 - 8U	1/2	1/2	3/4-16	9.90	13/16	7/8	22.86	21.84	35.81	45.97
SAUI -12 - 12U	3/4	3/4	1-1/16-12	15.49	1-1/8	1-1/8	24.38	21.84	43.18	53.34
SAUI -16 - 16U	1	1	1-5/16-12	21.33	1-3/8	1-1/2	31.24	26.41	49.27	61.46


Connects Fractional Tubes To An Flared Tubes

Part No.	Tube OD	AN Tube Flare Size (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	L
					h	H				
SAUI - 6M - 4U	6	1/4	7/16-20	4.8	12.7	14	15.2	17.7	30.20	37.5
SAUI - 12M - 8U	12	1/2	3/4-16	9.5	20.6	22	22.8	21.8	35.80	45.9
SAUI - 18M - 12U	18	3/4	1-1/16-12	15.1	28.6	30	24.3	21.8	43.20	53.3
SAUI - 25M - 16U	25	1	1-5/16-12	21.8	34.9	38	31.2	26.4	49.27	61.4

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
 - Unless otherwise specified, all dimensions are in millimeters.
 - Sizes, pressure classes, and end connections not listed are available upon request.
 - Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SRI

Reducer

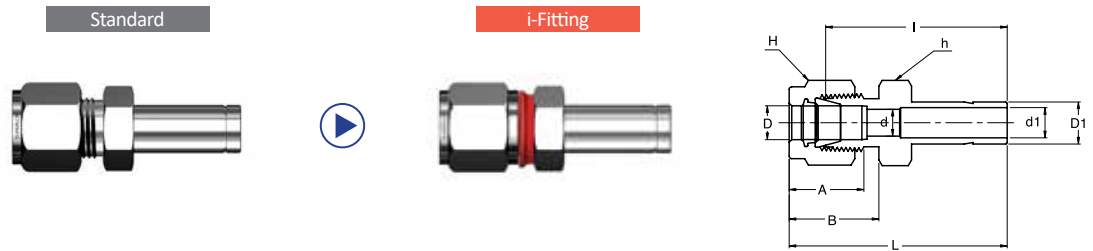

Connects Fractional Tubes To Fractional SUPERLOK Port

Part No.	Tube OD		d Min	d1 Min	Width Across Flat		A	B	I	L
	D (inch)	D ₁ (inch)			h (inch)	H (inch)				
SRI - 4 - 2	1/4	1/8	4.83	2.1	1/2	9/16	15.24	17.78	29.46	36.83
SRI - 4 - 3	1/4	3/16	4.83	3.0	1/2	9/16	15.24	17.78	30.22	37.59
SRI - 4 - 4	1/4	1/4	4.83	4.4	1/2	9/16	15.24	17.78	31.75	39.11
SRI - 4 - 5	1/4	5/16	4.83	5.6	1/2	9/16	15.24	17.78	32.51	39.87
SRI - 4 - 6	1/4	3/8	4.83	6.9	1/2	9/16	15.24	17.78	33.27	40.64
SRI - 4 - 8	1/4	1/2	4.83	9.4	9/16	9/16	15.24	17.78	38.86	46.22
SRI - 4 - 10	1/4	5/8	4.83	12.0	11/16	9/16	15.24	17.78	40.64	48.00
SRI - 4 - 12	1/4	3/4	4.83	14.8	13/16	9/16	15.24	17.78	41.40	47.75
SRI - 6 - 4	3/8	1/4	7.11	4.4	5/8	11/16	16.76	19.30	34.03	41.40
SRI - 6 - 6	3/8	3/8	7.11	6.9	5/8	11/16	16.76	19.30	35.81	43.18
SRI - 6 - 8	3/8	1/2	7.11	9.4	5/8	11/16	16.76	19.30	41.14	48.51
SRI - 6 - 10	3/8	5/8	7.11	12.0	11/16	11/16	16.76	19.30	42.92	50.29
SRI - 6 - 12	3/8	3/4	7.11	14.8	13/16	11/16	16.76	19.30	42.92	50.29
SRI - 8 - 4	1/2	1/4	10.41	4.4	13/16	7/8	22.86	21.84	34.79	44.95
SRI - 8 - 6	1/2	3/8	10.41	6.9	13/16	7/8	22.86	21.84	36.57	46.73
SRI - 8 - 8	1/2	1/2	10.41	9.4	13/16	7/8	22.86	21.84	42.16	52.32
SRI - 8 - 10	1/2	5/8	10.41	12.0	13/16	7/8	22.86	21.84	43.68	53.84
SRI - 8 - 12	1/2	3/4	10.41	14.8	13/16	7/8	22.86	21.84	43.68	53.84
SRI - 8 - 16	1/2	1	10.41	20.4	1-1/16	7/8	22.86	21.84	50.03	60.19
SRI - 12 - 8	3/4	1/2	15.74	9.4	1-1/16	1-1/8	24.38	21.84	44.45	54.61
SRI - 12 - 16	3/4	1	15.74	20.4	1-1/16	1-1/8	24.38	21.84	52.32	62.48


Connects Metric Tubes To Metric SUPERLOK Port

Part No.	Tube OD		d Min	d1 Min	Width Across Flat		A	B	I	L
	D	D ₁			h	H				
SRI - 6M - 8M	6	8	4.8	5.6	14	14	15.3	17.7	32.5	39.9
SRI - 6M - 10M	6	10	4.8	7.1	14	14	15.3	17.7	33.3	40.7
SRI - 8M - 6M	8	6	6.4	4.1	15	16	16.2	18.6	32.8	40.3
SRI - 8M - 10M	8	10	6.4	7.1	15	16	16.2	18.6	34.5	42.0
SRI - 10M - 6M	10	6	7.9	4.1	18	19	17.2	19.5	34.8	42.4
SRI - 10M - 8M	10	8	7.9	5.6	18	19	17.2	19.5	35.8	43.4
SRI - 10M - 12M	10	12	7.9	8.8	18	19	17.2	19.5	42.2	49.8
SRI - 12M - 8M	12	8	9.5	5.6	22	22	22.8	22.0	35.8	45.9
SRI - 12M - 10M	12	10	9.5	7.1	22	22	22.8	22.0	36.6	46.7
SRI - 18M - 12M	18	12	15.1	8.8	27	30	24.4	22.0	44.5	54.6
SRI - 18M - 16M	18	16	15.1	12.0	27	30	24.4	22.0	46.0	56.1
SRI - 18M - 20M	18	20	15.1	15.5	27	30	24.4	22.0	47.5	57.6
SRI - 25M - 18M	25	18	21.8	13.9	35	38	31.3	26.5	50.8	63.1
SRI - 25M - 20M	25	20	21.8	15.5	35	38	31.3	26.5	52.3	64.6

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SOSCI

O-Seal Straight Thread Connector

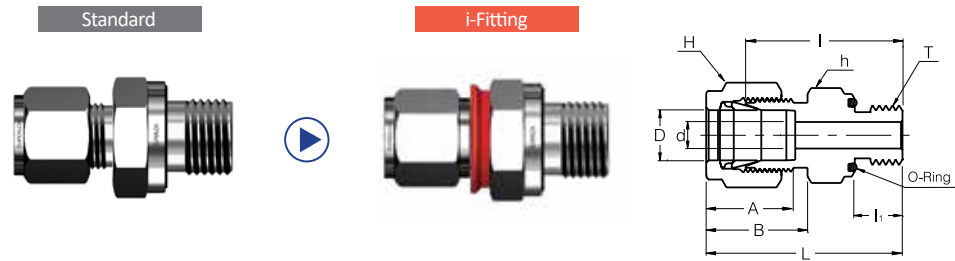

Connects Fractional Tube To Female Straight Thread


Part No.	Tube O.D. D (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h (inch)	H (inch)						
SOSCI - 4 - 4U	1/4	7/16-20	4.82	3/4	9/16	15.24	17.78	30.98	10.41	38.35	-111
SOSCI - 6 - 6U	3/8	9/16-18	7.11	15/16	11/16	16.76	19.30	35.05	11.93	42.41	-114
SOSCI - 8 - 8U	1/2	3/4-16	10.41	1-1/8	7/8	22.86	21.84	35.81	11.93	45.97	-116
SOSCI - 12 - 12U	3/4	1-1/16-12	15.75	1-1/2	1-1/8	24.38	21.84	42.16	14.22	52.32	-215
SOSCI - 16 - 16U	1	1-5/16-12	22.35	1-3/4	1-1/2	31.24	26.41	45.97	14.22	58.16	-219

Connects Metric Tube To Female Straight Thread

Part No.	Tube O.D. D	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h	H						
SOSCI - 6M - 4U	6	7/16-20	4.8	19	14	15.2	17.7	31.0	10.4	38.3	-111
SOSCI - 12M - 8U	12	3/4-16	9.5	28.6	22	22.8	21.8	35.8	11.9	45.9	-116
SOSCI - 18M - 12U	18	1-1/16-12	15.1	38.1	28	24.3	21.8	42.2	14.2	52.3	-215
SOSCI - 25M - 16U	25	1-5/16-12	21.8	44.4	38	31.2	26.4	46.0	14.2	58.1	-219

SOPCI

O-Seal Pipe Thread Connector

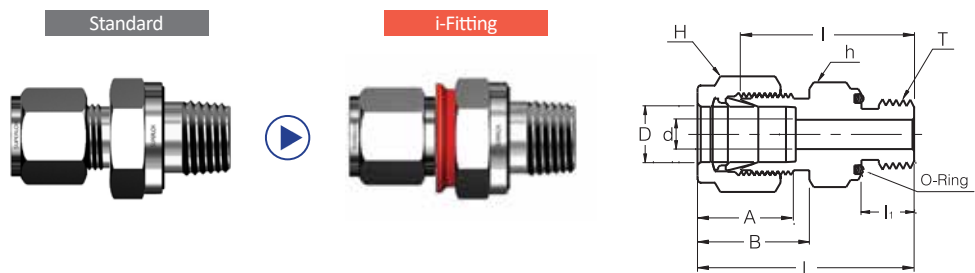


Connects Fractional Tube To Female NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h (inch)	H (inch)						
SOPCI - 4 - 2N	1/4	1/8	4.82	3/4	9/16	15.24	17.78	27.68	7.11	35.05	-111
SOPCI - 4 - 4N	1/4	1/4	4.82	15/16	9/16	15.24	17.78	30.98	9.65	38.35	-113
SOPCI - 6 - 4N	3/8	1/4	7.11	15/16	11/16	16.76	19.30	32.51	9.65	39.87	-113
SOPCI - 6 - 6N	3/8	3/8	7.11	1-1/8	11/16	16.76	19.30	34.03	10.41	41.40	-116
SOPCI - 6 - 8N	3/8	1/2	7.11	1-5/16	11/16	16.76	19.30	39.62	13.46	46.99	-212
SOPCI - 8 - 8N	1/2	1/2	10.41	1-5/16	7/8	22.86	21.84	39.62	13.46	49.78	-212

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SSMCI

SAE/MS Male Connector

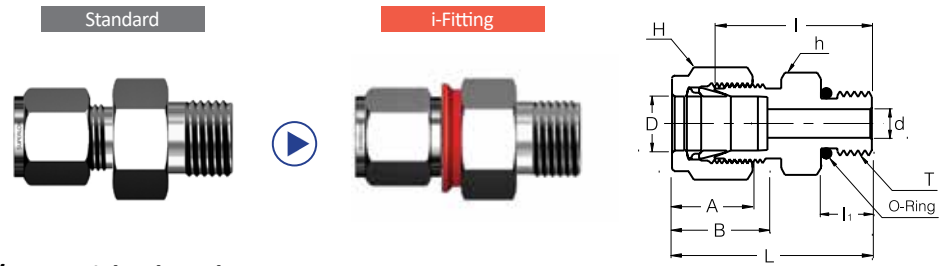

Connects Fractional Tubes To SAE/MS Straight Thread Boss

Part No.	Tube O.D. D (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h (inch)	H (inch)						
SSMCI - 4 - 4U	1/4	7/16-20	4.82	9/16	9/16	15.24	17.78	26.67	9.14	34.03	3-904
SSMCI - 4 - 6U	1/4	9/16-18	4.82	11/16	9/16	15.24	17.78	28.19	9.90	35.56	3-906
SSMCI - 4 - 8U	1/4	3/4-16	4.82	7/8	9/16	15.24	17.78	30.22	11.17	37.59	3-908
SSMCI - 4 - 10U	1/4	7/8-14	4.82	1	9/16	15.24	17.78	33.27	12.70	40.64	3-910
SSMCI - 6 - 4U	3/8	7/16-20	5.08	5/8	11/16	16.76	19.30	28.19	9.14	35.56	3-904
SSMCI - 6 - 6U	3/8	9/16-18	7.11	11/16	11/16	16.76	19.30	29.71	9.90	37.08	3-906
SSMCI - 6 - 8U	3/8	3/4-16	7.11	7/8	11/16	16.76	19.30	31.75	11.17	39.11	3-908
SSMCI - 6 - 10U	3/8	7/8-14	7.11	1	11/16	16.76	19.30	34.79	12.70	42.16	3-910
SSMCI - 8 - 6U	1/2	9/16-18	7.11	13/16	7/8	22.86	21.84	28.95	9.90	39.11	3-906
SSMCI - 8 - 8U	1/2	3/4-16	10.41	7/8	7/8	22.86	21.84	31.75	11.17	41.91	3-908
SSMCI - 8 - 10U	1/2	7/8-14	10.41	1	7/8	22.86	21.84	34.79	12.70	44.95	3-910
SSMCI - 8 - 12U	1/2	1-1/16-12	10.41	1-1/4	7/8	22.86	21.84	38.86	14.98	49.02	3-912
SSMCI - 12 - 8U	3/4	3/4-16	10.66	1-1/16	1-1/8	24.38	21.84	35.81	11.17	45.97	3-908
SSMCI - 12 - 12U	3/4	1-1/16-12	15.74	1-1/4	1-1/8	24.38	21.84	38.86	14.98	49.02	3-912
SSMCI - 16 - 12U	1	1-1/16-12	16.76	1-3/8	1-1/2	31.24	26.41	41.14	14.98	53.34	3-912
SSMCI - 16 - 16U	1	1-5/16-12	22.35	1-1/2	1-1/2	31.24	26.41	42.16	14.98	54.35	3-916


Connects Metric Tubes To SAE/MS Straight Thread Boss

Part No.	Tube O.D. D	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h	H						
SSMCI - 6M - 4U	6	7/16-20	4.8	14.3	14.3	15.2	17.7	26.7	9.1	34.0	3-904
SSMCI - 6M - 6U	6	9/16-18	4.8	17.4	14.3	15.2	17.7	28.2	9.9	35.5	3-906
SSMCI - 6M - 8U	6	3/4-16	4.8	22.2	14.3	15.2	17.7	30.2	11.2	37.5	3-908
SSMCI - 6M - 10U	6	7/8-14	4.8	25.4	14.3	15.2	17.7	33.3	12.7	40.6	3-910
SSMCI - 12M - 6U	12	9/16-18	7.1	20.6	22.2	22.8	21.8	29.0	9.9	39.1	3-906
SSMCI - 12M - 8U	12	3/4-16	9.5	22.2	22.2	22.8	21.8	31.8	11.2	41.9	3-908
SSMCI - 12M - 10U	12	7/8-14	9.5	25.4	22.2	22.8	21.8	34.8	12.7	44.9	3-910
SSMCI - 12M - 12U	12	1-1/16-12	9.5	31.7	22.2	22.8	21.8	38.9	15.0	49.0	3-912
SSMCI - 18M - 8U	18	3/4-16	10.6	27	28.6	24.3	21.8	35.8	11.2	45.9	3-908
SSMCI - 18M - 12U	18	1-1/16-12	15.1	34.9	28.6	24.3	21.8	38.9	15.0	49.0	3-912
SSMCI - 25M - 12U	25	1-1/16-12	16.7	34.9	38.1	31.2	26.4	41.1	15.0	53.3	3-912
SSMCI - 25M - 16U	25	1-5/16-12	21.8	38.1	38.1	31.2	26.4	42.2	15.0	54.3	3-916

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SPWCI

Male Pipe
Weld Connector

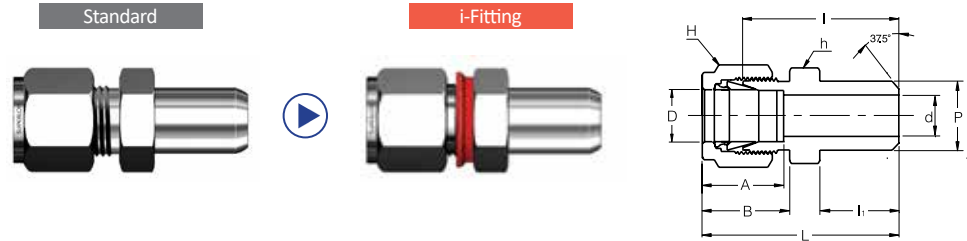

Connects Fractional Tubes To Pipe


Part No.	Tube O.D. D (inch)	Male Pipe Size(P)		d Min	Width Across Flat		A	B	I	I ₁	L
		Nom.	O.D.		h (inch)	H (inch)					
SPWCI - 4 - 2P	1/4	1/8	10.30	4.82	1/2	9/16	15.24	17.78	25.40	9.65	32.76
SPWCI - 4 - 4P	1/4	1/4	13.70	4.82	9/16	9/16	15.24	17.78	30.48	14.22	37.84
SPWCI - 6 - 4P	3/8	1/4	13.70	7.11	5/8	11/16	16.76	19.30	32.51	14.22	39.87
SPWCI - 6 - 6P	3/8	3/8	17.10	7.11	11/16	11/16	16.76	19.30	32.51	14.22	39.87
SPWCI - 6 - 8P	3/8	1/2	21.30	7.11	7/8	11/16	16.76	19.30	38.86	19.05	46.22
SPWCI - 8 - 6P	1/2	3/8	17.10	10.41	13/16	7/8	22.86	21.84	33.27	14.22	43.43
SPWCI - 8 - 8P	1/2	1/2	21.30	10.41	7/8	7/8	22.86	21.84	38.86	19.05	49.02
SPWCI - 12 - 12P	3/4	3/4	26.67	15.74	1-1/16	1-1/18	24.38	21.84	40.38	19.05	50.54
SPWCI - 16 - 16P	1	1	33.40	22.35	1-3/8	1-1/2	31.24	26.41	50.03	23.87	62.23

Connects Metric Tubes To Pipe

Part No.	Tube O.D. D	Male Pipe Size(P)		d Min	Width Across Flat		A	B	I	I ₁	L
		Nom.	O.D.		h	H					
SPWCI - 6M - 2P	6	1/8	10.3	4.8	14	14	15.3	17.7	25.4	9.7	32.8
SPWCI - 6M - 4P	6	1/4	13.7	4.8	14	14	15.3	17.7	30.5	14.2	37.9
SPWCI - 8M - 8P	8	1/2	21.3	6.4	22	16	16.2	18.6	38.1	19.0	45.6
SPWCI - 10M - 4P	10	1/4	13.7	7.1	18	19	17.2	19.5	33.3	14.2	40.9
SPWCI - 10M - 6P	10	3/8	17.1	7.9	18	19	17.2	19.5	33.3	14.2	40.9
SPWCI - 10M - 8P	10	1/2	21.3	7.9	22	19	17.2	19.5	38.9	19.0	46.5
SPWCI - 12M - 4P	12	1/4	13.7	7.1	22	22	22.8	22.0	33.3	14.2	43.4
SPWCI - 16M - 8P	16	1/2	21.3	12.7	24	25	24.4	22.0	38.9	19.0	49.0
SPWCI - 18M - 8P	18	1/2	21.3	13.5	27	30	24.4	22.0	40.4	19.0	50.5

SMPWEI

Male Pipe Weld
Elbow

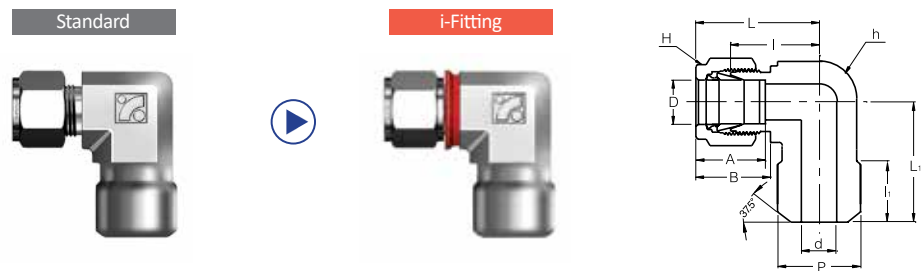

Connects Fractional Tubes To Pipe

Part No.	Tube O.D. D (inch)	Male Pipe Size(P)		d Min	Width Across Flat		A	B	I	I ₁	L	L ₁
		Nom.	O.D.		h (inch)	H (inch)						
SMPWEI - 4 - 4P	1/4	1/4	13.70	4.82	1/2	9/16	15.24	17.78	19.55	14.22	26.90	23.37
SMPWEI - 6 - 4P	3/8	1/4	13.70	7.11	5/8	11/16	16.76	19.30	23.11	14.22	30.48	25.40
SMPWEI - 8 - 8P	1/2	1/2	21.30	10.41	13/16	7/8	22.86	21.84	25.90	19.05	36.06	33.02


Connects Metric Tubes To Pipe

Part No.	Tube O.D. D	Male Pipe Size(P)		d Min	Width Across Flat		A	B	I	I ₁	L	L ₁
		Nom.	O.D.		h	H						
SMPWEI - 6M - 4P	6	1/4	13.70	4.8	12.7	14.3	15.2	17.7	19.6	14.2	26.9	23.4
SMPWEI - 12M - 8P	12	1/2	21.30	9.5	20.6	22.2	22.8	21.8	25.9	19.1	36.1	33.0

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SSWCI

Tube Socket Weld Connector



Connects Fractional Tubes



Part No.	Tube O.D. D (inch)	d Min	P	Width Across Flat		A	B	I	I ₁	L	L ₁
				h (inch)	H (inch)						
SSWCI - 4	1/4	4.82	11.17	1/2	9/16	15.24	17.78	26.16	7.87	33.52	10.41
SSWCI - 6	3/8	7.11	15.74	5/8	11/16	16.76	19.30	30.22	9.65	37.59	11.93
SSWCI - 8	1/2	10.41	19.05	13/16	7/8	22.86	21.84	30.98	12.70	41.14	11.93
SSWCI -12	3/4	15.74	26.67	1-1/16	1-1/8	24.38	21.84	33.27	14.22	43.43	11.93
SSWCI - 16	1	22.35	33.27	1-3/8	1-1/2	31.24	26.41	40.38	19.05	52.57	14.22

Connects Metric Tubes

Part No.	Tube O.D. D	d Min	P	Width Across Flat		A	B	I	I ₁	L	L ₁
				h	H						
SSWCI - 6M	6	4.8	11.17	12.7	14.3	15.2	17.7	26.2	7.9	33.5	10.4
SSWCI - 12M	12	9.5	19.05	20.6	22.2	22.8	21.8	31.0	12.7	41.1	11.9
SSWCI - 18M	18	15.1	26.67	27	28.6	24.3	21.8	33.3	14.2	43.4	11.9
SSWCI - 25M	25	21.8	33.27	34.9	38.1	31.2	26.4	40.4	19.1	52.6	14.2

SSWEI

Tube Socket Weld Elbow

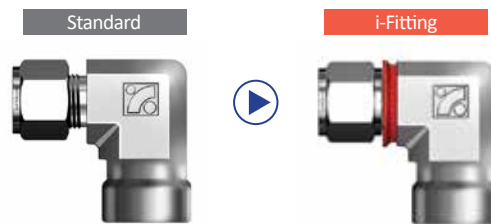

Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	P	Width Across Flat		A	B	I	I ₁	L	L ₁
				h (inch)	H (inch)						
SSWEI - 4	1/4	4.82	12.70	1/2	9/16	15.24	17.78	19.55	7.87	26.92	19.55
SSWEI - 6	3/8	7.11	15.75	5/8	11/16	16.76	19.30	23.11	9.65	30.48	23.11
SSWEI - 8	1/2	10.41	20.57	13/16	7/8	22.86	21.84	25.90	12.70	36.06	25.90
SSWEI - 12	3/4	15.74	26.92	1-1/16	1-1/8	24.38	21.84	29.71	14.22	39.87	29.71
SSWEI - 16	1	22.35	35.05	1-3/8	1-1/2	31.24	26.41	36.83	19.05	49.02	36.83

Connects Metric Tubes

Part No.	Tube O.D. D	d Min	P	Width Across Flat		A	B	I	I ₁	L	L ₁
				h	H						
SSWEI - 6M	6	4.8	12.70	12.7	14.3	15.2	17.7	19.6	7.9	26.9	19.6
SSWEI - 12M	12	9.5	20.57	20.6	22.2	22.8	21.8	25.9	12.7	36.1	25.9
SSWEI -18M	18	15.1	26.92	27	28.6	24.3	21.8	29.7	14.2	39.9	29.7
SSWEI - 25M	25	21.8	35.05	34.9	38.1	31.2	26.4	36.8	19.1	49.0	36.8

- Dimensions and Drawings are for reference only and are subject to change without prior notice.

- Unless otherwise specified, all dimensions are in millimeters.

- Sizes, pressure classes, and end connections not listed are available upon request.

- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

Memo



BMT Co., Ltd.

| Head Quarter

(46031) 부산시 기장군 장안읍 신소재산단2로 17 (반룡리)

17, Sinsojaesandan 2-ro, Jangan-eup, Gijang-gun, Busan, 46031 South Korea

TEL: +82 51 780 5000 FAX: +82 51 780 5100

📍 **HQ RELOCATION:** The above New Address and Contact Information are effective from 15th of June, 2023.

E-mail: superlok@superlok.com

WEB: www.superlok.com

Fittings & Valves

INDUSTRIAL

Instrumentation Tube Fittings

i-Fitting®

Ball/Plug Valves

Double Block & Bleed Valves

Manifold/Gauge Valves

Globe/Needle Valves

Cryogenic Valves

Check/Relief/Excess Flow Valves

Medium/High Pressure Fittings & Valves

ULTRA HIGH PURITY

Weld & Metal Face Seal Fittings

Bend Fittings

Diaphragm Valves

Bellows Valves

Check Valves

Clean Ball Valves

Regulators

Electric & Energy

Metal Clad Switchgear (MCSG)

Compact Switchboard

Motor Control Center (MCC)

Smart Distribution Board

Energy Management System (EMS)