


SPMEIPositionable
Male Elbow**Connects Fractional Tubes To Female ISO Parallel Thread**

Part No.	Tube OD D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPMEI - 4 - 2G	1/4	1/8	4.06	1/2	9/16	9/16	15.24	17.78	19.56	26.92	26.42	17.27
SPMEI - 4 - 4G	1/4	1/4	4.83	5/8	3/4	9/16	15.24	17.78	21.59	28.96	32.26	22.86
SPMEI - 6 - 4G	3/8	1/4	5.84	5/8	3/4	11/16	16.76	19.30	23.11	30.48	32.26	22.86
SPMEI - 6 - 6G	3/8	3/8	7.11	13/16	7/8	11/16	16.76	19.30	25.91	33.27	37.08	26.42
SPMEI - 8 - 4G	3/8	1/4	5.84	13/16	3/4	7/8	22.86	21.84	25.91	36.07	35.05	26.42
SPMEI - 8 - 6G	1/2	3/8	7.87	13/16	7/8	7/8	22.86	21.84	25.91	36.07	37.08	22.86
SPMEI - 8 - 8G	1/2	1/2	10.41	15/16	1-1/16	7/8	22.86	21.84	27.94	38.10	43.43	26.42
SPMEI - 12 - 8G	3/4	1/2	11.94	1-1/16	1-1/16	1-1/8	24.38	21.84	29.72	39.88	45.21	32.00
SPMEI - 12 - 12G	3/4	3/4	15.75	1-1/16	1-3/8	1-1/8	24.38	21.84	29.72	39.88	48.77	41.15
SPMEI - 16 - 12G	1	3/4	15.75	1-3/8	1-3/8	1-1/2	31.24	26.42	36.83	49.02	53.34	41.15
SPMEI - 16 - 16G	1	1	19.81	1-3/8	1-5/8	1-1/2	31.24	26.42	36.83	49.02	53.59	48.51

Connects Metric Tubes To Female ISO Parallel Thread


Part No.	Tube OD D	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMEI - 6M - 2G	6	1/8	4.0	12.7	14.3	14	15.3	17.7	19.6	27.0	26.4	17.3
SPMEI - 6M - 4G	6	1/4	4.8	22.2	19	14	15.3	17.7	21.6	29.0	32.3	22.9
SPMEI - 8M - 2G	8	1/8	4.0	14.3	14.3	16	16.2	18.6	21.3	28.8	27.4	17.3
SPMEI - 8M - 4G	8	1/4	5.9	22.2	19	16	16.2	18.6	22.4	29.9	32.2	22.9
SPMEI - 10M - 4G	10	1/4	5.9	20.6	19	19	17.2	19.5	25.9	33.5	35.0	22.9
SPMEI - 10M - 6G	10	3/8	7.9	20.6	22.2	19	17.2	19.5	25.9	33.5	37.1	26.4
SPMEI - 12M - 4G	12	1/4	5.9	20.6	19	22	22.8	22.0	25.9	36.0	35.0	22.9
SPMEI - 12M - 8G	12	1/2	9.5	23.8	27	22	22.8	22.0	27.9	38.0	43.4	32.0
SPMEI - 12M - 12G	12	3/4	9.5	27	34.9	22	22.8	22.0	29.7	39.8	48.8	41.1

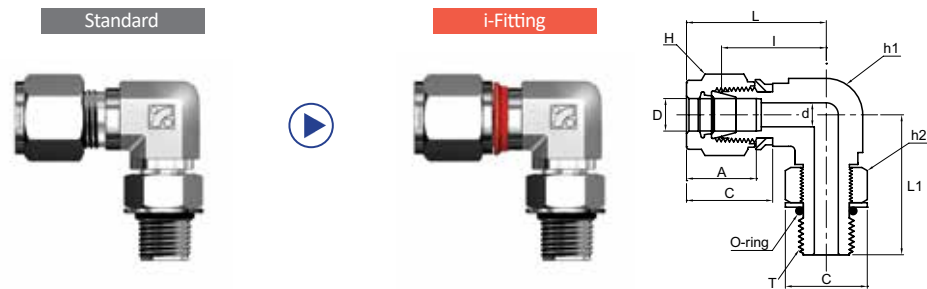

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.

SPMEI

Positionable
Male Elbow

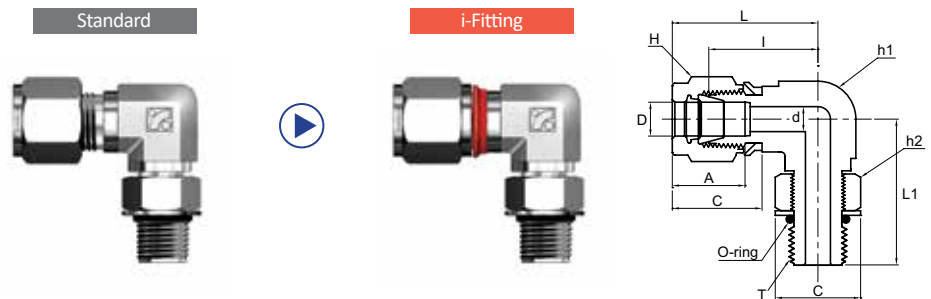

Connects Fractional Tubes To SAE/MS Straight Thread

Part No.	Tube OD D (inch)	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1 (inch)	h2 (inch)	H (inch)						
SPMEI - 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	21.08	28.45	28.45	16.51
SPMEI - 4 - 6U	1/4	9/16-18	4.83	5/8	11/16	9/16	15.24	17.78	23.11	30.48	32.26	20.07
SPMEI - 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	24.64	32.00	32.26	20.07
SPMEI - 6 - 8U	3/8	3/4-16	7.11	13/16	7/8	11/16	16.76	19.30	27.43	34.80	37.85	25.65
SPMEI - 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	27.43	37.59	37.85	25.65
SPMEI - 12 - 12U	3/4	1-1/16-12	15.75	1-1/16	1-1/4	1-1/8	24.38	24.84	31.24	41.40	48.77	36.58
SPMEI - 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	38.35	50.55	53.59	43.94

Connects Metric Tubes To SAE/MS Straight Thread

Part No.	Tube OD D	Straight Thread T(U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMEI - 6M - 4U	6	7/16-20	4.8	12.7	14.3	14	15.2	17.7	21.1	28.4	28.6	16.5
SPMEI - 12M - 8U	12	3/4-16	9.5	20.6	22.2	22	22.8	21.8	27.4	37.5	37.6	25.6
SPMEI - 18M - 12U	18	1-1/16-12	15.1	27	31.7	30	24.3	24.8	31.2	41.4	48.8	36.5
SPMEI - 25M - 16U	25	1-5/16-12	21.8	34.9	38.1	38	31.2	26.4	38.4	50.5	53.6	43.9

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.
- Dimensions shown with SUPERLOK nuts finger-tight, where applicable.